

Cryogenic Operation of Third-Generation, 200-GHz Peak- f_T , Silicon–Germanium Heterojunction Bipolar Transistors

Bhaskar Banerjee, *Student Member, IEEE*, Sunitha Venkataraman, *Student Member, IEEE*, Yuan Lu, Qingqing Liang, *Student Member, IEEE*, Chang-Ho Lee, *Member, IEEE*, Sebastien Nuttinck, Dekhyuon Heo, Yi-Jan Emery Chen, *Member, IEEE*, John D. Cressler, *Fellow, IEEE*, Joy Laskar, *Senior Member, IEEE*, Greg Freeman, *Senior Member, IEEE*, and David C. Ahlgren

Abstract—We present a comprehensive investigation of the cryogenic performance of third-generation silicon–germanium (SiGe) heterojunction bipolar transistor (HBT) technology. Measurements of the current–voltage (dc), small-signal ac, and broad-band noise characteristics of a 200-GHz SiGe HBT were made at 85 K, 120 K, 150 K, 200 K, and 300 K. These devices show excellent behavior down to 85 K, maintaining reasonable dc ideality, with a peak current gain of 3800, a peak cut-off frequency (f_T) of 260 GHz, a peak f_{max} of 310 GHz, and a minimum noise figure (NF_{min}) of approximately 0.30 dB at a frequency of 14 GHz, in all cases representing significant improvements over their corresponding values at 300 K. These results demonstrate that aggressively scaled SiGe HBTs are inherently well suited for cryogenic electronics applications requiring extreme levels of transistor performance.

Index Terms—Broad-band noise, cryogenic temperature, extreme environments, heterojunction bipolar transistor (HBT), high-frequency noise, silicon–germanium (SiGe).

I. INTRODUCTION

SILICON–GERMANIUM (SiGe) heterojunction bipolar transistor (HBT) technology has recently emerged as an important alternative to III–V device technologies for RF and mixed-signal applications. Commercial SiGe technologies with transistor performance in the range of 50–100 GHz now exist today in many companies worldwide, and recent work [2] has demonstrated that manufacturable SiGe HBT technologies with performance well above 200 GHz can be achieved by careful profile and structural design. It is well established that, due to bandgap engineering, SiGe HBTs are naturally suited for use in the cryogenic environment (e.g., at 77 K or even down

to 4.2 K) [3], an operational regime traditionally forbidden to conventional silicon (Si) bipolar junction transistors (BJTs).

At present, cryogenic electronics represent a small but important niche market, with applications such as high-sensitivity cooled sensors and detectors, satellite systems, deep-space and planetary space missions, very high-precision instrumentation and detector electronics, superconductor–semiconductor hybrid electronic systems, and very-low-noise receivers for astronomy. In this study, we present a comprehensive investigation of the cryogenic performance of a scaled 200-GHz SiGe HBT technology.

II. SiGe TECHNOLOGY AND MEASUREMENT SETUP

The SiGe HBTs used in the investigation are from a commercial third-generation SiGe HBT process technology which employs a new reduced-thermal-cycle “raised extrinsic base” structure and utilizes deep and shallow trench isolation, an *in situ* doped polysilicon emitter, a silicided extrinsic base, and a carbon-doped graded UHV/CVD epitaxial SiGe base (Fig. 1 [2]) with a minimum emitter width of 0.12 μm , a measured peak f_T of 200 GHz, and peak f_{max} of 285 GHz at room temperature (300 K). It was not optimized for cryogenic operation in any way.

Measurements were performed using a custom-designed cryogenic probing system which enables on-wafer microwave measurements across the temperature range of 18–350 K [4]. S-parameters were measured to 26 GHz using an HP 8510C VNA. Noise parameters were measured from 2 to 26 GHz using an automated ATN noise measurement system, employing a “multiple source impedance” parameter extraction methodology. The thermometry of the cryogenic setup was carefully verified using transistor dc measurements dipped in a bath of liquid nitrogen (i.e., 77.3 K). Conventional “open” structure, Y-subtraction parasitic de-embedding was used for both the S-parameter and noise parameter measurements, and system calibration was performed at each temperature to ensure accuracy across the entire temperature range.

III. SiGe HBTs OPERATING AT CRYOGENIC TEMPERATURES

It has long been known that conventional Si BJTs are not suitable for operation at cryogenic temperatures because of the combined detrimental effects of: 1) the exponential decrease in

Manuscript received October 7, 2004; revised January 28, 2005. The review of this paper was arranged by Editor J. N. Burghartz.

B. Banerjee, S. Venkataraman, Y. Lu, Q. Liang, C.-H. Lee, J. D. Cressler, and J. Laskar are with the Georgia Electronic Design Center and School of Electrical and Computer Engineering, Georgia Institute of Technology, Atlanta, GA 30308 USA (e-mail: bhaskar@ece.gatech.edu).

S. Nuttinck is with the Silicon Process Options Group, Philips Research, 3001 Heverlee, Belgium.

D. Heo is with the Department of Electrical Engineering and Computer Science, Washington State University, Pullman, WA 99164 USA.

Y.-J. E. Chen is with the Department of Electrical Engineering, National Taiwan University, Taipei 106, Taiwan, R.O.C.

G. Freeman and D. C. Ahlgren are with IBM Microelectronics, Hopewell Junction, NY 12533 USA.

Digital Object Identifier 10.1109/TED.2005.845078

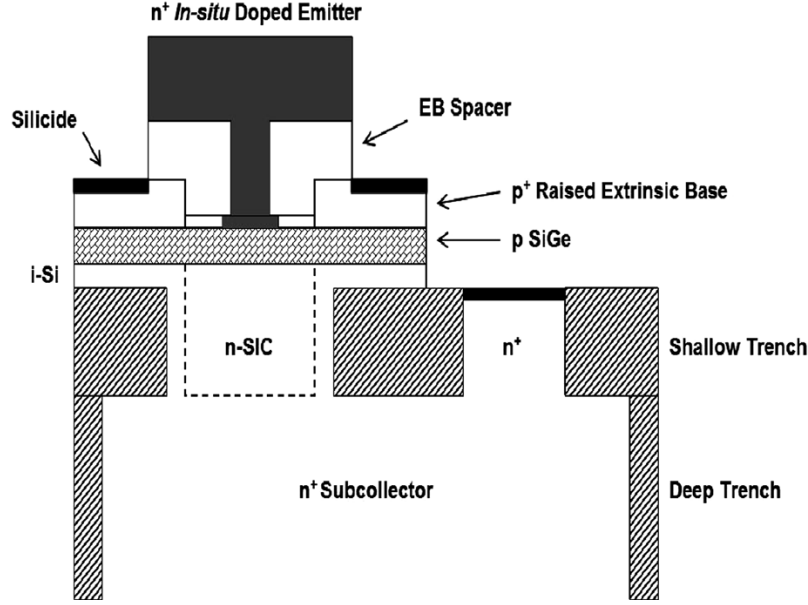


Fig. 1. Schematic device cross section of a raised extrinsic base SiGe HBT.

current gain with cooling due to heavy-doping-induced bandgap narrowing in the emitter; 2) the increase in base resistance with cooling due to carrier freeze-out in the base; and 3) the decrease in frequency response due to the degradation of the minority carrier diffusivity in the base region with cooling [5]. Thus, for Si BJTs optimized for high-speed operation at 300 K, current gain (β) degrades quasi-exponentially with cooling, the f_T and f_{\max} degrade with cooling, and, not surprisingly, the circuit delay (e.g., ECL) increases (degrades) with cooling, precluding their use at cryogenic temperatures.

Bandgap engineering has a very positive influence, however, on the low-temperature operation of SiGe HBTs. The thermal energy (kT), in every instance, is arranged in the SiGe HBT equations such that it favorably affects the low-temperature performance metric in question. For an SiGe HBT optimized for 300-K operation, when compared to a similarly constructed Si BJT, $\beta(T)$ should increase exponentially with decreasing temperature, since

$$\left. \frac{\beta_{\text{SiGe}}}{\beta_{\text{Si}}} \right|_{V_{\text{BE}}} \simeq \left\{ \frac{\tilde{\gamma}\tilde{\eta}\Delta E_{g,\text{Ge}}(\text{grade})/kT e^{\Delta E_{g,\text{Ge}}(0)/kT}}{1 - e^{-\Delta E_{g,\text{Ge}}(\text{grade})/kT}} \right\} \quad (1)$$

where

$$\tilde{\eta} = \frac{(D_{\text{nb}})_{\text{SiGe}}}{(D_{\text{nb}})_{\text{Si}}} \quad (2)$$

is the ratio of the minority electron diffusivity between SiGe and Si and

$$\tilde{\gamma} = \frac{(N_C N_V)_{\text{SiGe}}}{(N_C N_V)_{\text{Si}}} \quad (3)$$

is the “effective density-of-states ratio” between SiGe and Si. The Ge-induced reduction in the base bandgap occurring at the emitter–base edge of the quasi-neutral base is $\Delta E_{g,\text{Ge}}(x=0)$ and

$$\Delta E_{g,\text{Ge}}(\text{grade}) = \Delta E_{g,\text{Ge}}(W_b) - \Delta E_{g,\text{Ge}}(0) \quad (4)$$

where W_b is the neutral base width. This indicates that one should expect a quasi-exponential increase in the SiGe-to-Si current gain ratio with decreasing temperature. In addition, $V_A(T)$ should also increase exponentially with decreasing temperature when compared to Si BJT, since

$$\left. \frac{V_{A,\text{SiGe}}}{V_{A,\text{Si}}} \right|_{V_{\text{BE}}} \simeq e^{\Delta E_{g,\text{Ge}}(\text{grade})/kT} \left[\frac{1 - e^{-\Delta E_{g,\text{Ge}}(\text{grade})/kT}}{\Delta E_{g,\text{Ge}}(\text{grade})/kT} \right]. \quad (5)$$

The frequency response of SiGe HBTs should also improve with decreasing temperature, as can be seen from

$$\begin{aligned} \frac{\tau_{b,\text{SiGe}}}{\tau_{b,\text{Si}}} &= \frac{2}{\tilde{\eta}} \frac{kT}{\Delta E_{g,\text{Ge}}(\text{grade})} \\ &\times \left\{ 1 - \frac{kT}{\Delta E_{g,\text{Ge}}(\text{grade})} \left[1 - e^{-\Delta E_{g,\text{Ge}}(\text{grade})/kT} \right] \right\} \end{aligned} \quad (6)$$

$$\frac{\tau_{e,\text{SiGe}}}{\tau_{e,\text{Si}}} \simeq \frac{J_{C,\text{Si}}}{J_{C,\text{SiGe}}} = \frac{1 - e^{-\Delta E_{g,\text{Ge}}(\text{grade})/kT}}{\tilde{\gamma}\tilde{\eta} \frac{\Delta E_{g,\text{Ge}}(\text{grade})}{kT} e^{\Delta E_{g,\text{Ge}}(0)/kT}} \quad (7)$$

both of which are favorably influenced by cooling. We assume here that the influence of the graded SiGe profile is also sufficient to overcome the inherent electron diffusivity degradation on τ_b with cooling. Detailed derivations of these equations can be found in [5].

Hence, we expect that SiGe HBTs, even without optimization for cryogenic operation, will naturally have improved performance with cooling, provided carrier freeze-out is prevented by using an abrupt and heavily doped (above the Mott transition) epitaxial base. As will be shown, this is indeed the case for the present SiGe technology.

IV. MEASUREMENT RESULTS AND DISCUSSION

A. DC Performance

Current–voltage measurements across the 85–300-K temperature range were made on SiGe HBTs with an emitter area

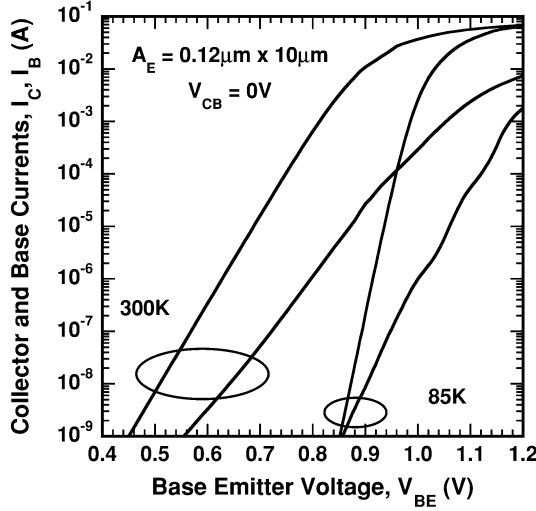


Fig. 2. Forward Gummel Characteristics at 300 K and 85 K for a $0.12 \times 10.0 \mu\text{m}^2$ SiGe HBT.

of $0.12 \times 10.0 \mu\text{m}^2$ [6]. The forward-gummel characteristics at 300 K and 85 K are shown in Fig. 2, for $V_{CB} = 0$ V. In spite of the high peak base and emitter doping levels associated with these aggressively scaled SiGe HBTs ($>10^{19} \text{cm}^{-3}$), the base current remains reasonably ideal at 85 K. This is the result of the lightly doped epitaxial spacer layer inserted between the base and emitter regions and helps limit field-assisted tunneling and recombination at low temperatures. The base-emitter turn-on voltage increases with cooling, as expected, due to the exponential decrease of the intrinsic carrier concentration with cooling. The base and emitter regions in this device are both doped well above the Mott transition and ensure that carrier freeze-out does not negatively impact the base or emitter resistance below 100 K. As can be seen in Fig. 2 at 85 K, this device is capable of very high current density operation ($>25 \text{mA}/\mu\text{m}^2$), and thus the high collector doping level effectively limits the impact of heterojunction barrier effects at low temperatures, which can be a key design issue for the cryogenic operation of SiGe HBTs [3]. It can be noted that the slope of the collector current (g_m) increases with the base-emitter voltage as we decrease the temperature from 300 K to 85 K. For low injection, we can write

$$g_m = \frac{\partial I_C}{\partial V_{BE}} \simeq \frac{qI_C}{kT} \propto \frac{q}{kT} e^{qV_{BE}/kT}. \quad (8)$$

Fig. 3 shows the collector current as a function of the base-emitter voltage for various temperatures illustrating the change in the transconductance with temperature. Fig. 4 shows the base current as a function of the base-emitter voltage for various temperatures. It is interesting to note that the nonideal base current increases dramatically at 85 K compared to the collector current. This is because, at a given V_{BE} , both the base and collector currents decrease strongly going from 300 K to 85 K. The leakage current in the base, induced by the tunneling and field-assisted recombination processes associated with the high electric field in the emitter-base junction, though, remains largely

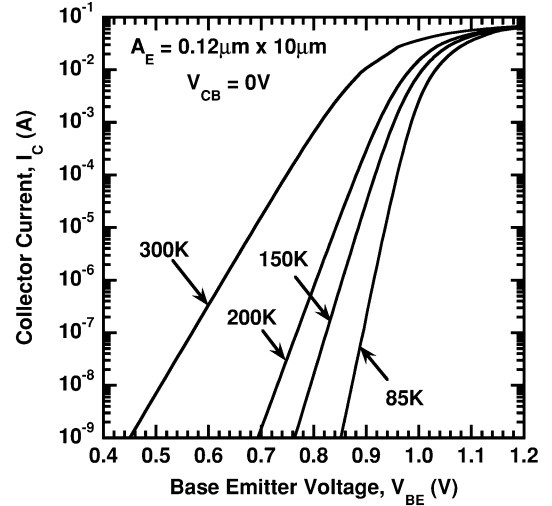


Fig. 3. Collector current as a function of base-emitter voltage at various temperatures for a $0.12 \times 10.0 \mu\text{m}^2$ SiGe HBT.

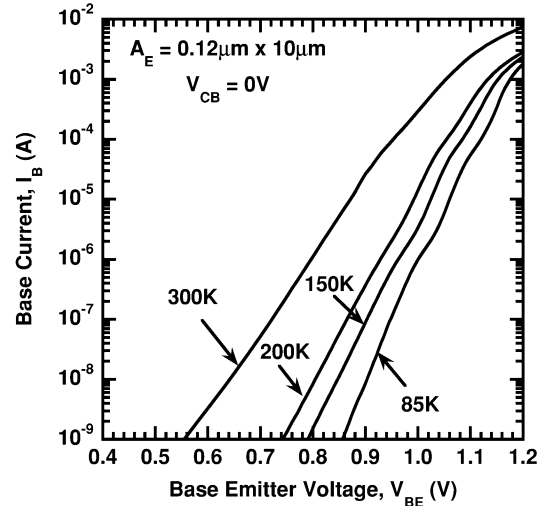


Fig. 4. Base current as a function of base-emitter voltage at various temperatures for a $0.12 \times 10.0 \mu\text{m}^2$ SiGe HBT.

constant over temperature (i.e., they are only weakly temperature-dependent mechanisms). This parasitic base leakage current increases the nonideal base current as we go from 300 K to 85 K.

Shown in Fig. 5 are typical output characteristics of the SiGe HBTs at 300 K and 85 K. The output characteristics remain reasonably ideal at 85 K with the breakdown voltage (BV_{CEO}) reducing from about 1.8 V at 300 K to about 1.6 V at 85 K.

A “negative-differential-resistance” (NDR) effect is observed in the forced- I_B output characteristics, which causes the overshoot-like characteristics in the collector current at 85 K [8]. A “hysteresis” in the voltage sweep direction of the $I-V$ characteristics appears in the NDR region at cryogenic temperatures. We observe (Fig. 5), at 85 K, that in the quasi-saturation region I_C decreases as V_{CE} increases, thus producing an NDR-like behavior. The effect of the NDR is also observed in the forward-gummel (Fig. 2), where we can observe “dips” in the I_B curve (decreasing and then increasing I_B) as can be seen in

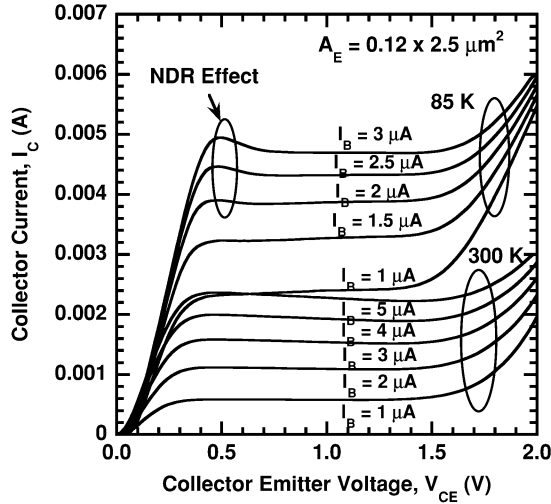


Fig. 5. Common-emitter output characteristics at 300 K and 85 K for a $0.12 \times 0.25 \mu\text{m}^2$ SiGe HBT.

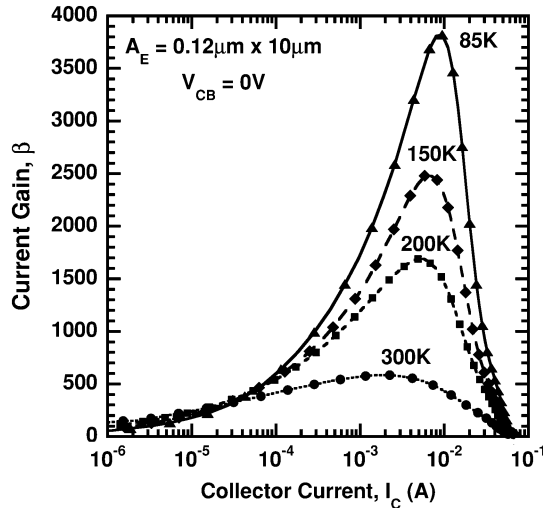


Fig. 6. Current gain as a function of bias current and temperature for a $0.12 \times 10.0 \mu\text{m}^2$ SiGe HBT.

Fig. 4. These dips become much more pronounced as we reach temperatures 150 K and lower.

The current gain increases monotonically with cooling from 600 at 300 K to 3800 at 85 K, as shown in Fig. 6. Two mechanisms are responsible for this improvement with cooling: 1) the (sizeable) Ge-induced band offset in this device (exponentially) increases the current gain with cooling (1) and 2) the heavily doped base region partially offsets the doping-induced bandgap narrowing associated with the emitter region. The strong decrease in the current gain above its peak value at 85 K is associated with the “Ge-grading” effect [9], but the current gain remains above 2000 at 85 K at the current density at which peak f_T is reached, effectively minimizing any emitter charge storage at low temperatures. Fig. 7 shows a normalized peak β as a function of reciprocal temperature ($1000/T$), illustrating the increase in peak β with the decrease in temperature (about $7 \times$ from 300 K to 85 K).

Avalanche multiplication effects were also studied at 300 K and 85 K to ascertain the effects of temperature on the break-

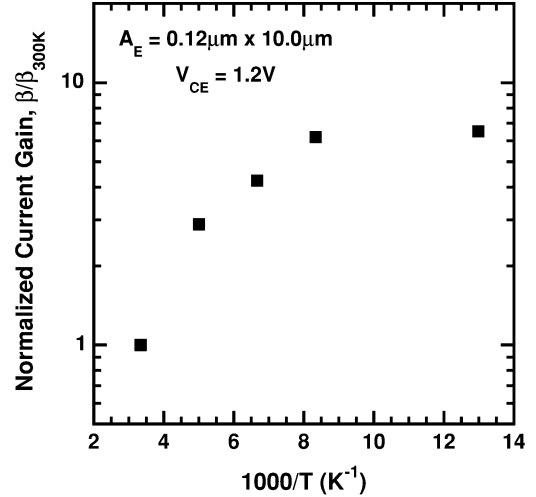


Fig. 7. Normalized peak current gain as a function of reciprocal temperature $1000/T$ for a $0.12 \times 10.0 \mu\text{m}^2$ SiGe HBT.

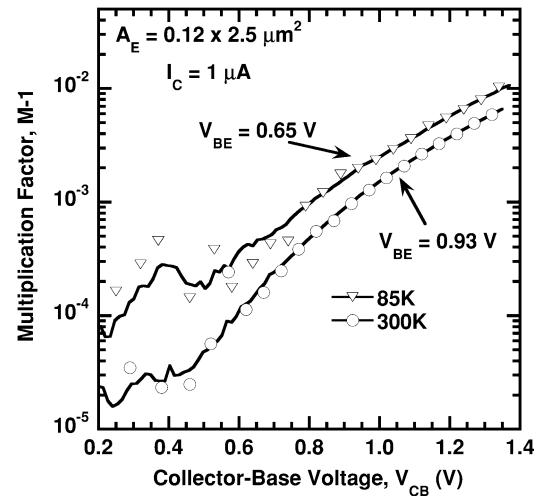


Fig. 8. Multiplication factor versus collector-base bias at 300 K and 85 K for a $0.12 \times 0.25 \mu\text{m}^2$ SiGe HBT.

down and reliability of this aggressively scaled SiGe HBTs. The $M - 1$ is calculated from I - V measurements using

$$M - 1 = \frac{\Delta I_B}{I_C - \Delta I_B}. \quad (9)$$

Fig. 8 shows the measured multiplication factor ($M - 1$) versus collector-base voltage (V_{CB}) at 85 K and 300 K. Since the collector current decreases strongly with V_{BE} as we go from 300 K to 85 K, to obtain similar I_C at 300 K and 85 K, the V_{BE} was increased from 0.65 V at 300 K to 0.93 V at 85 K. Only a weak increase in $M - 1$ with cooling is observed, as expected from previously reported work [10]. This modest temperature dependence of $M - 1$ with cooling alleviates the power supply limit posed by the base-current reversal voltage and indicates the suitability for these aggressively scaled SiGe HBTs for low-temperature circuit applications requiring higher V_{CB} .

B. Small-Signal Characteristics

On-wafer S-parameter measurements were performed at various temperatures. Fig. 9 shows the measured small-signal

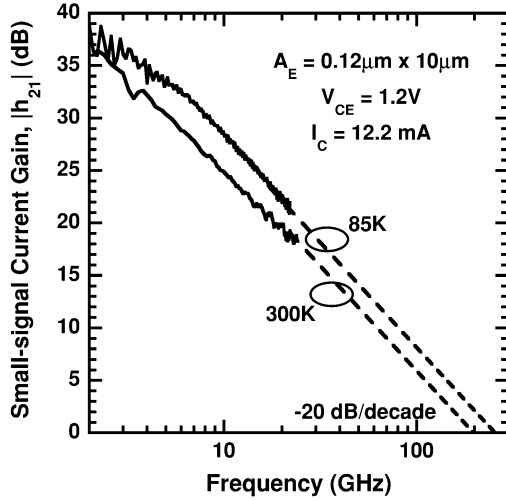


Fig. 9. Small-signal gain as a function of frequency at 300 K and 85 K for a $0.12 \times 10.0 \mu\text{m}^2$ SiGe HBT. Lines are drawn at 20 dB/decade.

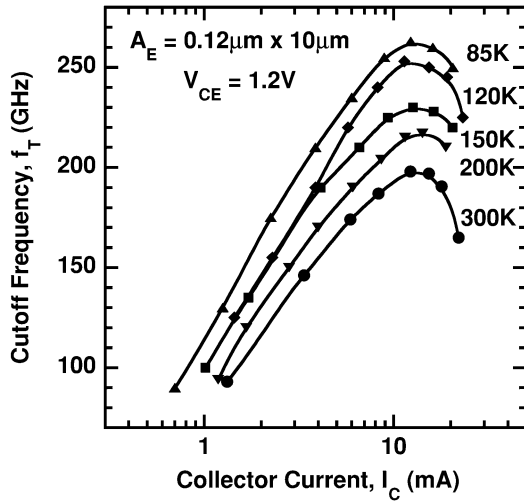


Fig. 10. Extracted cutoff frequency as a function of bias current for various temperatures for a $0.12 \times 10.0 \mu\text{m}^2$ SiGe HBT.

gain on frequency at peak f_T for a $0.12 \times 10.0 \mu\text{m}^2$ SiGe HBT at 300 K and 85 K ($V_{CE} = 1.2$ V). A near -20 -dB/decade slope is obtained across a wide frequency range for all temperatures. Fig. 10 shows the extracted cutoff frequency versus bias current data at 300 K, 200 K, 150 K, 120 K, and 85 K for the $0.12 \times 10.0 \mu\text{m}^2$ SiGe HBT. An increase in peak f_T from 200 GHz at 300 K to 260 GHz at 85 K is observed. This increase in the peak f_T with cooling is proportionately smaller than has been reported in first-generation SiGe HBTs operated at 85 K [11]. This is because, in the present case, the base and emitter transit times in this 200-GHz device, which are favorably affected by both the Ge-grading and cooling, are already small compared to the collector delay time, and thus their relative influence on the total transit time with cooling is smaller. We observe very little difference between the cutoff frequencies for 120 K and 150 K at low currents, which is likely the result of measurement accuracy limitations. Fig. 11 shows a plot of $1/(2\pi f_T)$ against $1/I_C$ at 300 K, 150 K, and 85 K. The extrapolated transit time decreases from 0.7 ps at 300 K

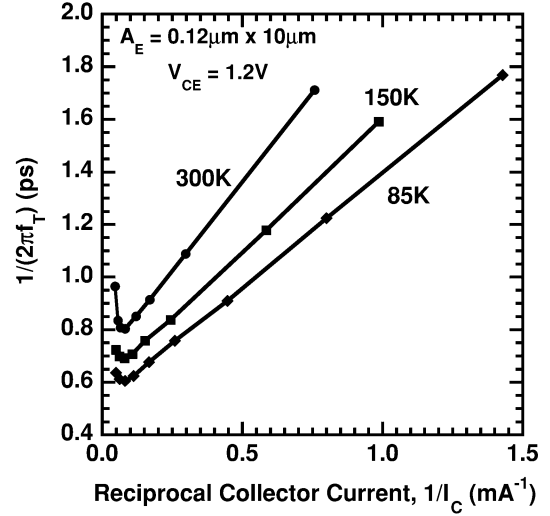


Fig. 11. Extrapolated transit time as a function of reciprocal current $1/I_C$ at various temperatures for a $0.12 \times 10.0 \mu\text{m}^2$ SiGe HBT.

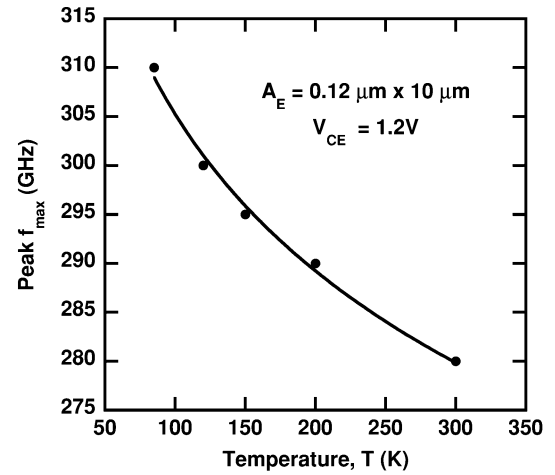


Fig. 12. Peak f_{\max} as a function of temperature for a $0.12 \times 10.0 \mu\text{m}^2$ SiGe HBT.

to 0.6 ps at 150 K and 0.5 ps at 85 K, and the total depletion capacitance of the device decreases with cooling, as expected, since the junction built-in voltages increase with cooling. f_{\max} is extracted from the measured S-parameters by extrapolating the unilateral gain at a -20 -dB/decade slope. The peak f_{\max} as a function of temperature is shown in Fig. 12. We observe that the peak f_{\max} increases from about 280 GHz at 300 K to 310 GHz at 85 K.

C. Broad-Band Noise Characteristics

The main sources of broad-band noise in these SiGe HBTs are the base and collector shot noise components and the base resistance-induced thermal noise. High f_T and β , along with low base resistance, can be used to produce SiGe HBTs with excellent broad-band noise performance at 300 K [12], [13]. The minimum noise figure NF_{\min} as a function of the collector current I_C (through g_m) can be written as

$$NF_{\min} = 1 + \frac{1}{\beta} + \sqrt{2g_m r_{bb}} \sqrt{\frac{1}{\beta} + \left(\frac{f}{f_T}\right)^2}. \quad (10)$$

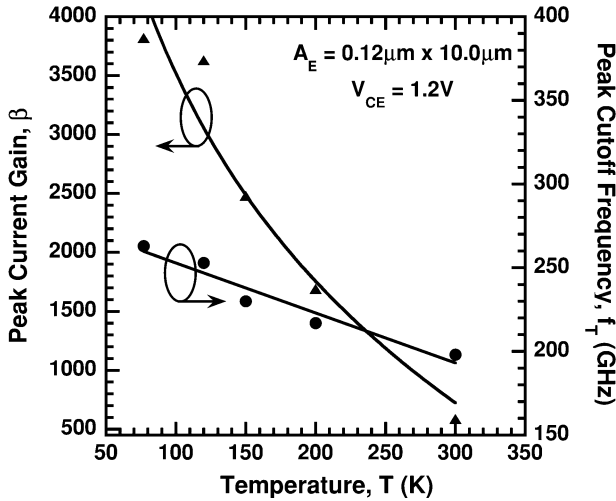


Fig. 13. Cutoff frequency and current gain as a function of temperature for a $0.12 \times 10.0 \mu\text{m}^2$ SiGe HBT.

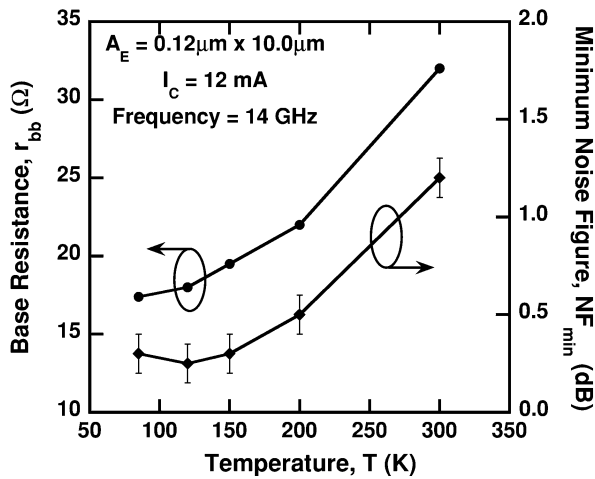


Fig. 14. Base resistance and minimum noise figure as a function of temperature for a $0.12 \times 10.0 \mu\text{m}^2$ SiGe HBT.

Since, in this case, the current gain β and the f_T both increase with cooling (Fig. 13), one would expect improved noise performance at low temperatures, provided the base resistance (r_{bb}) does not increase due to carrier freezeout at low temperatures. The measured noise data were well behaved at all temperatures with near-ideal parabolic impedance surfaces. Nevertheless, error bars are estimated on the extracted noise data of approximately ± 0.1 dB. Fig. 14 shows the behavior of both minimum NF_{\min} and the extracted r_{bb} as a function of temperature and shows that the base doping level is clearly above the Mott transition, effectively suppressing carrier freezeout. This decrease in the extracted r_{bb} also indicates that the f_{\max} should increase with cooling, which is indeed the case here, as was shown in Fig. 12. At a fixed collector current $I_C(g_m)$ and frequency, NF_{\min} depends on f_T , β , and r_{bb} , and hence NF_{\min} decreases as the temperature is reduced from 300 K to 85 K [see (10)]. This combined effect leads to a substantial decrease in the NF_{\min} with decreasing temperature, before it becomes dominated by the saturation of the base resistance, and the minimum noise figure thus tends to saturate. Fig. 15 shows the measured minimum noise figure (NF_{\min}) as

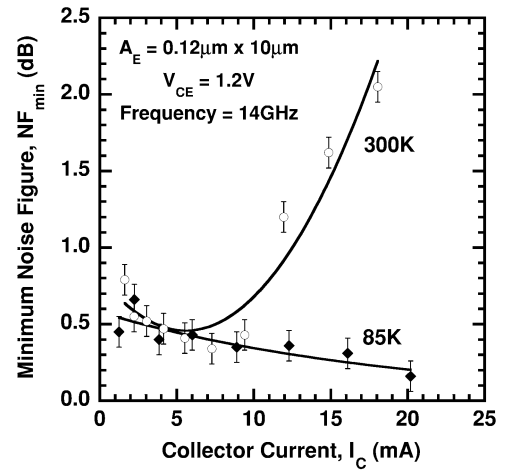


Fig. 15. Minimum noise figure as a function of bias current at 300 K and 85 K for a $0.12 \times 10.0 \mu\text{m}^2$ SiGe HBT.

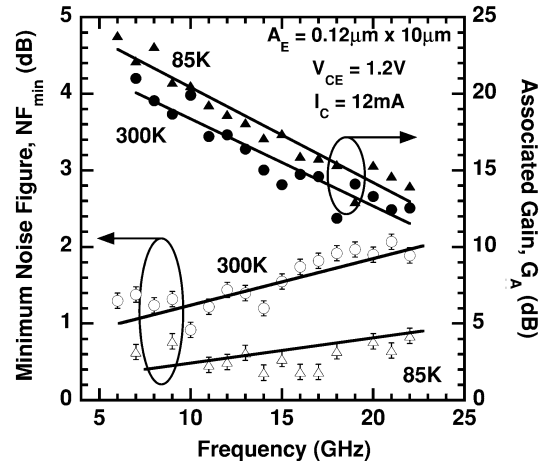


Fig. 16. Minimum noise figure and associated gain at $I_C = 12$ mA as a function of frequency at 300 K and 85 K for a $0.12 \times 10.0 \mu\text{m}^2$ SiGe HBT.

a function of bias current at 14 GHz. Interestingly, the rapid increase in NF_{\min} at high bias currents at 300 K, which is primarily determined by the base shot-noise component, disappears at cryogenic temperatures, again due to the combined increase in β , g_m , and f_T with cooling (10), allowing lower NF_{\min} to be achieved at peak f_T at 85 K. Fig. 16 shows the NF_{\min} and associated gain (G_A) as a function of frequency at $I_C = 12$ mA (peak f_T) for a $0.12 \times 10.0 \mu\text{m}^2$ SiGe HBT, at both 300 K and 85 K. Because of the increase in f_T from 200 to 260 GHz, an increase in β from 600 to 3800 and a decrease in r_{bb} from 32 to 18 Ω as we go from 300 K to 85 K, at the same $I_C(g_m)$, the NF_{\min} becomes a little weaker function of the frequency at 85 K than at 300 K. Hence, the NF_{\min} increases at a slower rate with frequency at 85 K than at 300 K as shown in Fig. 16. At 85 K, this device achieves a minimum NF_{\min} of about 0.3 dB ($G_A = 18$ dB) at 14 GHz, and a minimum NF_{\min} of about 0.75 dB ($G_A = 15$ dB) at 20 GHz.

V. SUMMARY

Current-voltage, small-signal ac, and broad-band noise characteristics of a 200-GHz SiGe HBT have been measured down to 85 K. At cryogenic temperatures, these SiGe HBTs maintain

excellent dc ideality, with a peak current gain of 3800, a peak cut-off frequency of 260 GHz, a peak f_{\max} of 310 GHz, and a minimum noise figure of approximately 0.30 dB at a frequency of 14 GHz and in all cases represent significant improvements over their corresponding 300 K values. These results were obtained from a SiGe HBT technology which is not optimized for cryogenic operation and suggest the inherent suitability of aggressively scaled SiGe HBT technology for cryogenic applications requiring extreme levels of transistor performance.

ACKNOWLEDGMENT

The authors would like to acknowledge the support of the Georgia Electronic Design Center at Georgia Tech. The wafers were fabricated at IBM Microelectronics, East Fishkill, NY. They would also like to thank D. Greenberg, J.-S. Rieh, A. Joseph, D. Hareme, D. Herman, B. Meyerson, and the IBM SiGe team for their support and contributions.

REFERENCES

- [1] J. D. Cressler, "SiGe HBT technology: A new contender for Si-based RF and microwave circuit applications," *IEEE Trans. Microw. Theory Tech.*, vol. 46, no. 5, pp. 572–589, May 1998.
- [2] B. Jagannathan, M. Khater, F. Pagette, J.-S. Rieh, D. Angell, H. Chen, J. Florkey, F. Golan, D. R. Greenberg, R. Groves, S. J. Jeng, J. Johnson, E. Mengitsu, K. T. Schonenberg, C. M. Schnabel, P. Smith, A. Stricker, D. Ahlgren, G. Freeman, K. Stein, and S. Subanna, "Self-aligned SiGe NPN transistors with 285 GHz f_{\max} and 207 GHz f_T in a manufacturable technology," *IEEE Electron Device Lett.*, vol. 23, no. 5, pp. 258–260, May 2002.
- [3] J. D. Cressler, J. H. Comfort, E. F. Crabbé, G. L. Patton, J. M. C. Stork, J. Y.-C. Sun, and B. Meyerson, "On profile design and optimization of epitaxial Si- and SiGe-base bipolar technology for 77 K applications—Part I: Transistor DC design considerations," *IEEE Trans. Electron Devices*, vol. 40, no. 3, pp. 525–541, Mar. 1993.
- [4] J. Laskar and M. Feng, "An on-wafer cryogenic microwave probing system for advanced transistor and superconductor applications," *Microw. J.*, vol. 36, pp. 104–114, 1993.
- [5] J. D. Cressler and G. Niu, *Silicon-Germanium Heterojunction Bipolar Transistors*. Boston, MA: Artech House, 2003.
- [6] B. Banerjee, S. Venkataraman, Y. Lu, S. Nuttinck, D. Heo, Y.-J. E. Chen, J. D. Cressler, J. Laskar, G. Freeman, and D. Ahlgren, "Cryogenic performance of a 200 GHz SiGe HBT technology," in *Proc. IEEE Bipolar/BiCMOS Circuits Technol. Meeting*, 2003, pp. 171–173.
- [7] A. J. Joseph, J. D. Cressler, and D. M. Richey, "Operation of SiGe heterojunction bipolar transistors in the liquid-helium temperature regime," *IEEE Electron Device Lett.*, vol. 16, no. 6, pp. 268–270, Jun. 1995.
- [8] Q. Liang, R. Krithivasan, A. Ahmed, Y. Lu, Y. Li, J. D. Cressler, G. Niu, J.-S. Rieh, G. Freeman, D. Ahlgren, and A. Joseph, "A new negative-differential-resistance effect in 350 GHz SiGe HBT's operating at cryogenic temperatures," *IEEE Electron Device Lett.*, to be published.
- [9] S. L. Salmon, J. D. Cressler, R. C. Jaeger, and D. L. Hareme, "The influence of Ge grading on the bias and temperature characteristics of SiGe HBT's for precision analog circuits," *IEEE Trans. Electron Devices*, vol. 47, no. 2, pp. 292–298, Feb. 2000.
- [10] G. Niu, J. D. Cressler, S. Zhang, U. Gogineni, and D. C. Ahlgren, "Measurement of collector-base junction avalanche multiplication effects in advanced UHV/CVD SiGe HBGTs," *IEEE Trans. Electron Devices*, vol. 46, no. 5, pp. 1007–1015, May 1999.
- [11] J. D. Cressler, E. F. Crabbé, J. H. Comfort, J. Y.-C. Sun, and J. M. C. Stork, "An epitaxial emitter-cap SiGe-Base bipolar technology optimized for liquid-nitrogen temperature operation," *IEEE Electron Device Lett.*, vol. 15, no. 11, pp. 472–474, Nov. 1994.
- [12] G. Niu, Z. Jin, J. D. Cressler, R. Apeta, A. J. Joseph, and D. Hareme, "Transistor noise in SiGe HBT RF technology," *IEEE J. Solid-State Circuits*, vol. 36, no. 9, pp. 1423–1427, Sep. 2001.
- [13] D. Greenberg, B. Jagannathan, S. Sweeney, G. Freeman, and D. Ahlgren, "Noise performance of a low base resistance 200 GHz SiGe technology," in *IEDM Tech. Dig.*, 2002, pp. 787–790.



Bhaskar Banerjee (S'01) received the B.Tech. (Honors) degree in electronics and electrical communication engineering from Indian Institute of Technology, Kharagpur, in 2001, and the M.S. degree in electrical and computer engineering from the Georgia Institute of Technology, Atlanta, in 2003, where he is currently working toward the Ph.D. degree.

His research interests include modeling, analysis, and characterization of SiGe HBTs and complementary-SiGe HBTs, their impact on high-speed, high-performance analog circuits, and analog circuit design for high-speed mixed-signal and wireless applications in silicon based processes (SiGe BiCMOS and Si-CMOS). He was a graduate intern at IBM Thomas J. Watson Research Center, Yorktown Heights, NY, and National Semiconductor Corporation. Previously, he was a graduate co-op with RF Solutions (now a part of Analogics Inc.) and an undergraduate intern at Texas Instruments Asia Development Center (India).



Sunitha Venkataraman (S'01) received the B.E. degree in computer science and the M.E. degree in microelectronics from the Birla Institute of Technology and Science, Pilani, India, in 1999 and 2001, respectively. She is currently working toward the Ph.D. degree in electrical engineering at the Georgia Institute of Technology, Atlanta.

Her research interests include modeling, characterization, and analysis of the noise performance of deep-submicrometer CMOS devices and investigation of scaling and temperature effects on

SiGe HBTs.

Yuan Lu received the B.S. degree in physics from Beijing University, Beijing, China, in 1998 and the M.S. degree from the Chinese Academy of Sciences, Beijing, China, in 2001. He is currently working toward the Ph.D. degree in electrical and computer engineering at the Georgia Institute of Technology, Atlanta.


His research interest includes device physics and high-speed electronics.



Qingqing Liang (S'01) was born in Hunan, China, in September 1977. He received the B.S. and M.S. degrees in electrical engineering from Fudan University, Shanghai, China, in 1997 and 2000, respectively. He is currently working toward the Ph.D. degree in electrical and computer engineering at the Georgia Institute of Technology, Atlanta.

His research focuses on the modeling, simulation, and characterization of SiGe HBT devices and circuits and designing and optimizing building blocks for RF and microwave applications in at the device

and circuit levels.



Chang-Ho Lee (M'01) received the B.S. and M.S. degrees in electrical engineering from Korea University, Seoul, in 1989 and 1991, respectively, and the M.S. and Ph.D. degrees in electrical and computer engineering from the Georgia Institute of Technology (Georgia Tech), Atlanta, in 1999 and 2001, respectively.

He was a Research Engineer with Dacom Corporations, Korea, from 1994 to 1996. In 2000, he joined RF Solutions, Inc. Norcross, GA, where he was a Staff Engineer. In 2003, he became a member of the

research faculty at Georgia Tech. His research interest includes satellite/wireless communication system design, design/characterization of the transceiver RFICs in GaAs-based MESFET/pHEMT/HBT and Si-based CMOS/SiGe HBT processes, as well as LTCC/MLO-based multilayer multichip modules development for wireless communication applications. His current research is related to low-power multistandard reconfigurable transceiver design for wireless sensor applications.



Sebastien Nuttinck received the Engineering Diploma and the Diploma of Advanced Studies in 1999 and the Ph.D. degree in 2003 from the National Institute of Applied Sciences, Toulouse, France.

He performed his doctorate research work within the Microwave Application Group, Georgia Institute of Technology, Atlanta. During that time, he focused on the development of emerging technologies for high-performance communication systems. His work has included the development of microwave characterization systems and analysis, modeling, and

applications of GaN, SOI, InP, SiGe, VCSEL, and 3D-MMIC technologies. He is now with Philips Research, Leuven, Belgium, in the Silicon Process Options Group, working toward the development of advanced CMOS technologies for RF applications.



Dekhyoun Heo received Ph.D. degree in electrical and computer engineering from the Georgia Institute of Technology, Atlanta, in 2000.

In 2000, he joined the National Semiconductor Corporation, Norcross, GA, where he served as a Senior Design Engineer to develop SiGe RFICs for cellular applications. After two years of industry experience with National Semiconductor, he joined Washington State University, Pullman, as an Assistant Professor to perform research focusing on integration of high-frequency electronics with

integration of mixed technologies for next-generation wireless communication. His research interests include RF/microwave/opto transceiver design based on CMOS, BiCMOS, SiGe, and GaAs technologies for wireless data communications, the development of active device nonlinear model for power amplifiers, low-power wireless sensor implementation for wireless telemetry systems, and the radiation-hardened by design techniques for space communications.

Dr. Heo was the recipient of the Best Paper Award in the student paper competition at the 2000 IEEE International Microwave Symposium.



Yi-Jan Emery Chen (S'97-M'02) received the B.S. degree in electrical engineering from National Taiwan University, Taipei, the M.S. degree in electrical and computer engineering from the University of California, Santa Barbara, and the Ph.D. degree from the Georgia Institute of Technology (Georgia Tech), Atlanta, in 2003.

From 1992 to 1993, he was a Software Engineer with Siemens Telecommunication, working on the SONET equipment development. He was with Tektronix from 1993 to 1996, where he was

responsible for the electronic test and measurement solutions. In 1996, he enrolled in the Ph.D. program at Georgia Tech. In 1998, he joined National Semiconductor working on RF transceiver and RF power amplifier IC design. In 2002, he returned to Georgia Tech as the member of the research faculty to work on device-to-circuit interactions of advanced SiGe technology. He joined the faculty at National Taiwan University in 2003, where he is currently an Assistant Professor with the Graduate Institute of Electronics Engineering. His recent research focuses on the design and integration of RF/microwave integrated circuits and systems for both wireless and wireline communications, including RF IC/module development, RF power amplifier design, gigascale interconnect, System-on-Package integration, and device modeling.

Dr. Chen was the corecipient of the 2000 IEEE MTT-S International Microwave Symposium (IMS) Best Paper Award.



John D. Cressler (S'86-A'91-SM'91-F'01) received the B.S. degree in physics from the Georgia Institute of Technology (Georgia Tech), Atlanta, in 1984 and the M.S. and Ph.D. degrees in applied physics from Columbia University, New York, NY, in 1987 and 1990, respectively.

From 1984 to 1992, he was on the Research Staff with the IBM Thomas J. Watson Research Center, Yorktown Heights, NY, and, from 1992 to 2002, on the faculty at Auburn University, Auburn, AL. In 2002, he joined the faculty at Georgia Tech, where

he is currently the Byers Professor of Electrical and Computer Engineering. His research interests include: SiGe devices and technology, analog/digital/RF through mm-wave circuits built from SiGe devices, radiation effects, cryogenic electronics, device-to-circuit interactions, noise, and linearity, SiC devices and technology, reliability physics, extreme environment electronics, device-level simulation, and compact circuit modeling. He has published over 300 papers related to his research. He is the coauthor of the book (with Guofu Niu) *Silicon-Germanium Heterojunction Bipolar Transistors* (Boston, MA: Artech House, 2003) and author of the book *Reinventing Teenagers: The Gentle Art of Instilling Character in Our Young People* (Philadelphia, PA: Xlibris, 2004).

Dr. Cressler was an Associate Editor for the IEEE JOURNAL OF SOLID-STATE CIRCUITS (1998–2001) and is a Guest Editor of the IEEE TRANSACTIONS ON NUCLEAR SCIENCE (2002–2005). He served on the Technical Program Committees of the IEEE International Solid-State Circuits Conference (1992–1998, 1999–2001), the IEEE Bipolar/BiCMOS Circuits and Technology Meeting (1995–1999), the IEEE International Electron Devices Meeting (1996–1997), the IEEE Nuclear and Space Radiation Effects Conference (2000, 2002–present), and the IEEE International Reliability Physics Symposium (2005). He was the Technical Program Chair of the 1998 IEEE International Solid-State Circuits Conference (ISSCC) and the Conference Co-chair of the 2004 IEEE Topical Meeting on Silicon Monolithic Integrated Circuits in RF Systems. He currently serves on the Executive Steering Committee for the IEEE Topical Meeting on Silicon Monolithic Integrated Circuits on Low-Temperature Electronics, on the Technical Program Committee for the IEEE International SiGe Technology and Device Meeting, and on the Executive Committee of the ECS Symposium on SiGe: Materials, Processing, and Devices. He has served as an IEEE Electron Devices Society Distinguished Lecturer since 1994 and was the recipient of the 1994 Office of Naval Research Young Investigator Award for his SiGe research program, the 1996 C. Holmes MacDonald National Outstanding Teacher Award by Eta Kappa Nu, the 1996 Auburn University Alumni Engineering Council Research Award, the 1998 Auburn University Birdsong Merit Teaching Award, the 1999 Auburn University Alumni Undergraduate Teaching Excellence Award, and an IEEE Third Millennium Medal in 2000. He was elected an IEEE Fellow in 2001 “for contributions to the understanding and optimization of silicon and silicon-germanium bipolar transistors.”



Joy Laskar (S'84–M'85–SM'02) received the B.S. degree in computer engineering (with highest honors) from Clemson University, GA, in 1985 and the M.S. and Ph.D. degrees in electrical engineering from the University of Illinois at Urbana-Champaign in 1989 and 1991, respectively.

Prior to joining the Georgia Institute of Technology (Georgia Tech), Atlanta, in 1995, he held faculty positions with the University of Illinois and the University of Hawaii. At Georgia Tech, he holds the Joseph M. Pettit Professorship of Electronics and

is the Director of Georgia's Electronic Design Center. His research has focused on high-frequency IC design and their integration. At Georgia Tech, he heads a research group with a focus on integration of high-frequency electronics with optoelectronics and integration of mixed technologies for next-generation wireless and optoelectronic systems. He has authored or coauthored more than 200 papers, several book chapters (including three textbooks in development), and numerous invited talks and has more than 20 patents pending. His research has produced numerous patents and transfer of technology to industry. Most recently, his work has resulted in the formation of two companies. In 1998, he cofounded an advanced WLAN IC Company: RF Solutions, which is now part of Anadgics. In 2001, he cofounded a next-generation interconnect company Quellan, which is developing collaborative signal processing solutions for enterprise applications. In July of 2001, he was named the Joseph M. Pettit Professor of Electronics in the School of Electrical and Computer Engineering at Georgia Tech.

Dr. Laskar was the recipient of the Army Research Office's Young Investigator Award in 1995, the National Science Foundation's CAREER Award in 1996, the National Science Foundation (NSF) Packaging Research Center Faculty of the Year in 1997, and the NSF Packaging Research Center Educator of the Year in 1998 and was the corecipient of the IEEE Rappaport Award (Best IEEE Electron Devices Society Journal Paper) in 1999, the faculty advisor for the 2000 IEEE MTT IMS Best Student Paper Award, the Georgia Tech Faculty Graduate Student Mentor of the Year in 2001, the IBM Faculty Award in 2002, the Clemson University College of Engineering Outstanding Young Alumni Award in 2003, and the Outstanding Young Engineer of the Microwave Theory and Techniques Society in 2003. For the 2004–2006 term, he has been appointed an IEEE Distinguished Microwave Lecturer for his seminar entitled "Recent Advances in High Performance Communication Modules and Circuits."



Greg Freeman (S'82–M'90–SM'03) received the B.S.E.E. degree from the University of Delaware, Newark, in 1984 and the M.S.E.E. and Ph.D. degrees from Stanford University, Stanford, CA, in 1986 and 1991, respectively.

He has been with IBM Microelectronics, Hopewell Junction, NY, since 1991, where he has been involved in many technical positions in technology development and device design. He initially served as an in-line test, defect inspection, and failure analysis diagnostics engineer in bipolar, logic, and

DRAM technologies. During this time, he was also a key contributor to a project to develop internal IBM object-oriented software for enabling the broad engineering community to access electrical test data and perform basic device diagnostics. From 1995 to 2004, he was involved in IBM SiGe BiCMOS technologies, responsible for device diagnostics on the first commercially qualified SiGe HBT technology in 1996, followed by device and technology design of several IBM technologies, including IBM's 90-GHz and 120-GHz BiCMOS. From 2000 to 2004, he was Manager of a device design and RF characterization and compact modeling group. Accomplishments included during that time are the design, characterization, analysis, and modeling of IBM's 200-GHz and world-record 375-GHz SiGe HBT. Since late 2004, he has managed a 65-nm SOI CMOS device design group, in a joint alliance project with IBM, Sony, Toshiba, and AMD. His research interests are the design, reliability, and application issues of high-speed silicon devices. He has authored over 50 publications and holds over five patents.



David C. Ahlgren received the B.A. degree from DePauw University, Greencastle, IN, in 1973 and the Ph.D. degree in chemical physics from the University of Michigan, Ann Arbor, in 1979.

He joined IBM Microelectronics, Hopewell Junction, NY, in 1979, conducting semiconductor process development. His early work was in the area of silicon defects resulting from ion implantation and isolation stress, as well as process integration issues which led to the development and subsequent production of IBM's first double polysilicon bipolar

technology in 1983. In 1989, his attention turned to Si/SiGe HBTs as the next step in the advancement of IBM's bipolar mainframe semiconductor technology. His early device studies, process technology work, and semiconductor production experience has led him to his role in the Advanced Semiconductor Technology Center as a Senior Engineer in device and process development of high-performance Si/SiGe BiCMOS technology and its introduction into manufacturing. He is currently a Senior Engineering Manager of SiGe Advanced BiCMOS Technology Development. He has published over 50 technical papers and holds nine patents in semiconductor device and process technology.