

Multiple Variation Decomposition and Rational Sub-grouping on Modeling Process Non-uniformity

執行期間 90 年 8 月 1 日至 91 年 7 月 31 日

共同主持人 陳正剛

- 赴國外出差或研習心得報告一份
- 赴大陸地區出差或研習心得報告一份
- 出席國際學術會議心得報告及發表之論文各一份
- 國際合作研究計畫國外研究報告書一份

執行單位 台灣大學工商管理學系：

中 華 民 國 91 年 8 月 1 日

行政院國家科學委員會專題研究計畫成果報告

製程非均勻度的多重變異分解與合理分群之研究

Multiple Variation Decomposition and Rational Sub-grouping on Modeling Process Non-uniformity

計畫編號 NSC 90-2416-H-002-030:

執行期限 90/08/01 ~ 91/07/31 :

主持人 郭瑞祥 台灣大學工商管理學系

共同主持人: 陳正剛 台灣大學工業工程研究所

摘要

本研究針對製程非均勻度做系統性的研究。運用合理分群的方式找出影響非均勻度的自然變異以及特殊變異，並利用系統性的分析，提出改善非均勻度的方法。合理分群的主要目的，乃是根據製程的特性，藉由統計的方法，將資料作系統性的抽樣與分群，期能將製程發生特殊變異與自然變異分離開來，這樣的變異分離提供了下列的好處（1）增加特殊變異被偵測出的敏感性，（2）針對不同變異來源，便於施予不同的消除對策。依據上述的目的，在本研究中，我們以快速熱氧化製程中晶圓表面沉澱薄膜之厚度為研究載具，將非均勻度的統計模型依其變異來源加以分解後提出三種不同的非均勻度模型 NU_1 ， NU_2 ， NU_3 。其中， NU_1 代表晶圓表面整體的非均勻度， NU_2 代表將晶圓表面分區之後，各區內的粗糙程度， NU_3 代表各區厚度之間的非平坦度，且觀察出其相互之間的關係為 $NU_1^2 \approx NU_2^2 + NU_3^2$ 。此外，更利用了數理及模擬分析的方法，驗證了我們所建立之非均勻度之統計特性，並且針對其不同特性，提出改善的對策。

關鍵詞 非均勻度，合理分群，變異分解

Abstract

In this research, we focus on the process non-uniformity and its variation causes. We apply the concept of rational sub-grouping to the systematic search for the special causes and propose methods for non-uniformity reduction. The advantages of rational sub-grouping are twofold: (1) higher sensitivity for special causes (2) effective classification of variation sources. We used the oxidation layer's non-uniformity of a rapid thermal process (RTP) as an example. By using the rational sub-grouping method, we develop three non-uniformity statistics: NU_1 , NU_2 , and NU_3 , to represent different variation sources. Among the three statistics, NU_1 represents the overall non-uniformity and is a statistic usually adopted in practice. We also propose two novel statistics. NU_2 represents the surface roughness while NU_3 is an indication of the surface unevenness. We find the relationship among the three statistics to be: $NU_1^2 \approx NU_2^2 + NU_3^2$. In addition, the statistical properties of the three statistics are analytically investigated and their

properties are further verified using simulations. Results provide in-depth information for process improvement strategies.

Keywords: non-uniformity, rational subgrouping, variation decomposition

INTRODUCTION

Spatial uniformity is an important issue in semiconductor manufacturing processes, especially when the feature size is getting smaller and the wafer size is getting larger. It generally presents challenges in modeling, optimization, and control. In the literature, Taguchi has treated variation reduction as a pure robustness problem and minimized its value through parameter design [1]. Others have modeled the variation more specifically using the regression techniques. In particular, the Single Response Surface and Multiple Response Surfaces methods are discussed and compared [2][3]. In this paper, we use Response Surface Method (RSM), which consists of statistical design of experiments and regression techniques. Although RSM is a well-known methodology in the statistical literature, in practice it is the rational subgrouping of data and the choice of response metric that make the applications and interpretations ineffective and difficult.

The goal of this paper is then to present the rational subgrouping methodology for the modeling and optimization of the wafer-level spatial uniformity. A single-wafer rapid thermal oxidation of silicon process is used as the experimental platform.

RAPID THERMAL OXIDATION

For the growth of gate dielectrics in ULSI, rapid thermal oxidation (RTO) of silicon is an alternative to the conventional furnace processing. When compared with the conventional furnace processing, RTO has the advantages of single-wafer processing, low thermal budget, shorter processing time, and easy integration into cluster tools. However, it also contains some potential disadvantages, such as inconsistent temperature measurement, lack of thorough knowledge of the process, process nonuniformity and control. To increase the manufacturability of the RTO process, we need to optimize the process through process modeling techniques and reduce the nonuniformity problem. The single-wafer RTO machine used in this research is illustrated in Figure 1.

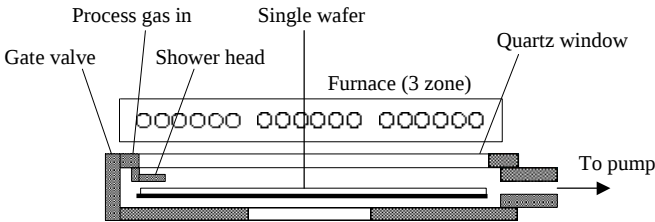


Figure 1: Single-wafer rapid thermal chamber

EXPERIMENTAL DESIGN OF TWO FACTORS

In the RTO experiments, two process factors, processing time and temperature, were first used as the experimental factors in modeling the wafer-level spatial uniformity. An experimental (3 by 3) design with nine runs was performed. In each run more than 200 oxide thickness data were collected. Table 1 illustrates the experimental design.

Exp. no	Time (min)	Temp (°C)	NU_1 (%)	NU_2 (%)	NU_3 (%)
1	1	900	9.85	6.85	7.37
2	1	950	8.15	5.53	6.49
3	1	1000	7.48	4.75	6.20
4	2	900	7.73	6.06	5.03
5	2	950	5.99	4.09	4.69
6	2	1000	6.47	4.44	5.05
7	4	900	6.58	4.67	4.93
8	4	950	4.04	3.16	2.75
9	4	1000	4.37	2.60	3.76

Table 1: Experimental design and nonuniformity values

In the traditional modeling approach, we would calculate the wafer-level nonuniformity using the metric in (1), in which $\bar{x}$ is the mean of all the thickness data on each wafer, and s is the estimated standard deviation (Figure 2a). With the nine nonuniformity values (Table 1), a second-order model that correlates the wafer-level nonuniformity to the two factors are constructed using the stepwise regression technique. Equation (2) shows the constructed model. For optimization purpose, we can perform canonical and ridge analysis on the response equation. It is usually useful to plot the contour plot to help identify the optimal point. Figure 3a illustrates the plot.


$$NU_1 = \frac{s}{\bar{x}} = \sqrt{\frac{\frac{1}{n-1} \sum_{i=1}^n (x_i - \bar{x})^2}{\frac{1}{n} \sum_{i=1}^n x_i}} \quad (1)$$

$$NU_1 = 393.2355 - 0.7929(Temp) + 0.0004(Temp)^2 - 0.0012(Temp * Time) \quad (2)$$


With the same set of data, there is a second way to define the nonuniformity metric. As shown in Figure 2b, we divide the wafer into nine zones and calculate each zone's nonuniformity. The wafer-level nonuniformity is then calculated by using Equation (3). Again we can construct a second-order model as shown in (4). The contour plot is shown in Figure 3b.

$$NU_2 = \sqrt{\frac{\sum_{j=1}^9 (s_j / \bar{x}_j)^2}{9}} \quad (3)$$


$$NU_2 = 251.7507 - 0.4999(Temp) + 0.0003(Temp)^2 - 0.0008(Temp*Time) \quad (4)$$

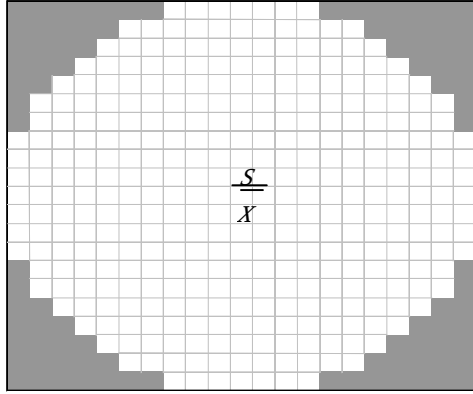

(a) $NU_1 = s / \bar{x}$

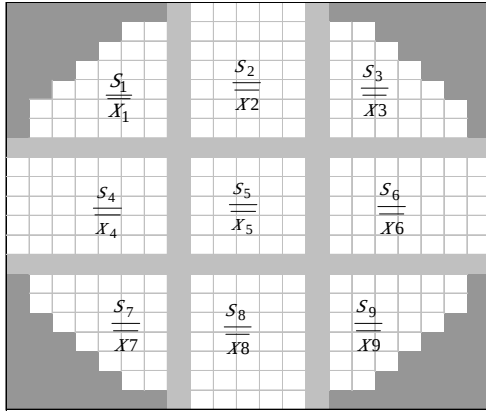

(b) $NU_2 = \sqrt{\sum_{j=1}^9 (s_j / \bar{x}_j)^2 / 9}$

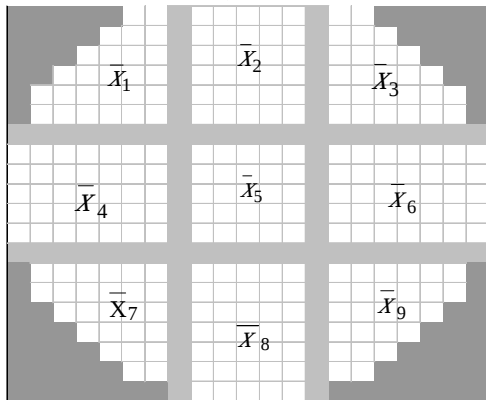

(c) $NU_3 = s' / \bar{x}$

With the same set of data, there is a third way to define the nonuniformity metric. As shown in Figure 2c, we divide the wafer into nine zones and calculate each zone's average thickness. The wafer-level nonuniformity is then obtained by calculating the nonuniformity of these nine average thicknesses (Table 1). Equation (5) defines the metric. Again we can construct a second-order model as shown in (6). The contour plot is shown in Figure 3c.

$$s' = \sqrt{\frac{1}{9-1} \sum_{j=1}^9 (\bar{x}_j - \bar{x})^2}$$

$$\bar{x} = \frac{1}{9} \sum_{j=1}^9 \bar{x}_j = \frac{1}{n} \sum_{i=1}^n x_i \text{ (if the same no. of points in all zones)}$$

$$NU_3 = s' / \bar{x} \quad (5)$$

$$NU_3 = 9.1553 + 0.3836(Time)^2 - 0.0030(Temp*Time) \quad (6)$$

Our goal is to optimize the process by minimizing the nonuniformity. However, with three different metrics and their corresponding response surface plots (Figures 3a - 3c), we are led to very different optimization strategies. In fact, under certain assumptions it can be proved that the relationship between NU_1 , NU_2 and NU_3 can be approximated by the following equation:

$$(NU_1)^2 \approx (NU_2)^2 + (NU_3)^2 \quad (7)$$

The total nonuniformity of the surface (NU_1) actually consists of two parts. The first term (NU_2) on the right hand side of (7) measures the surface *roughness* while the second term (NU_3) is a measure of the surface *unevenness*. For an even surface ($\bar{x}_1 = \bar{x}_2 = \dots = \bar{x}$), the second term becomes zero. Then, $NU_1 \approx NU_2$. For a surface with a slope (e.g. $\bar{x}_1 \leq \bar{x}_2 \leq \bar{x}_3$), $NU_1 \geq NU_2$.

Figure 3b reveals that a longer processing time can reduce the surface roughness while temperature should be set around 975°C to minimize the roughness. It can be also observed from Figure 3c that temperature does not have a significant effect on the surface evenness when processing time is less than three minutes. For processing time around three to four minutes, the higher the temperature the better the surface evenness. Since processing time has significant effects on both the roughness and the evenness, it results in a steeper ridge and a governing direction on the response surface of the total nonuniformity (NU_1) as shown in Figure 3a.

Figure 2: Three ways to define the nonuniformity metrics

In summary, when we optimize the process to minimize the thickness nonuniformity, the usual metric in (1) is not sufficient. Better strategies will be to minimize the roughness and the evenness separately. In general, the evenness is usually optimized through a better process or equipment design while the roughness can be minimized by refining the process recipe.

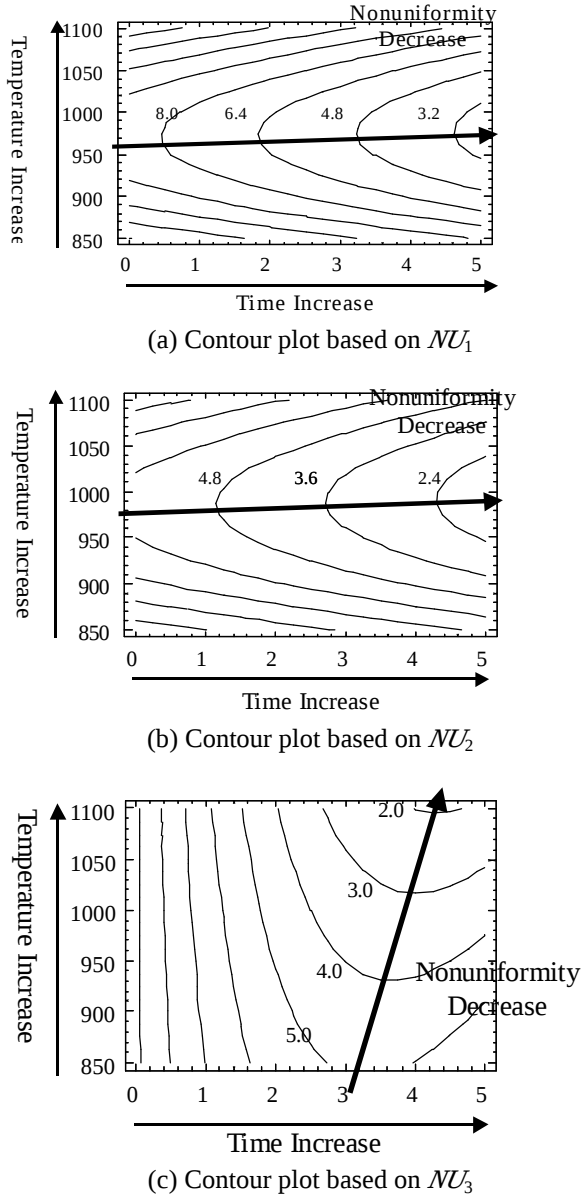


Figure 3: Response surface contour plots

EXPERIMENTAL DESIGN OF FOUR FACTORS

To further study the effect of rational subgrouping on modeling wafer-level nonuniformity, four-factor design of experiments were performed. Taguchi L9 experimental design [1] was used to study four factors: processing time, temperature, pressure and flow rate. In each run more than 200 oxide thickness data were collected. Table 2 illustrates the experimental design.

Exp. no	Time (min)	Temp (°C)	Press (mbar)	Flow (sccm)	NU_1 (%)	NU_2 (%)	NU_3 (%)
1	0.5	900	500	400	8.74	4.86	7.57
2	0.5	950	250	500	7.59	6.76	4.02
3	0.5	1000	375	300	9.07	6.78	6.36
4	1	900	250	300	20.42	16.30	12.23
5	1	950	375	400	10.38	4.86	9.65
6	1	1000	500	500	7.48	4.75	6.19
7	2	900	375	500	9.75	5.09	8.78
8	2	950	500	300	15.33	8.60	12.83
9	2	1000	250	400	16.45	10.90	12.71

Table 2: L9 design of four factors and nonuniformity values


Using the same metrics as defined in Equations (1), (3), and (5), nonuniformity values are calculated and summarized in Table 2. We then calculate the main effects of each factor and plot the effect plots [1] in Figure 4. Here in Figure 4, processing time is indicated by A, temperature by B, pressure by C and flow rate by D. The corresponding ANOVA tables are also listed in Tables 3, 4, and 5. Values in the graded areas represent the pooled errors.

In this experiment, we confirm the following observations from the first experiment:


- For processing time less than three minutes, temperature does not have a significant effect on the surface evenness (Figure 4 c, effect of B).
- To minimize the roughness, temperature should be set around 950°-975° (Figure 4b, effect of B).
- For processing time lasting for less than three minutes, its effect is especially strong on the evenness and is also significant on the roughness.
- The effect on the total nonuniformity appears to be the sum of the effects on the roughness and unevenness.

Additional observations can be summarized as follows:


- For the total nonuniformity, processing time, pressure, and flow rate are all significant factors.
- To minimize the nonuniformity, pressure should be set around 375 mbar.
- Flow rate seems to have negative effects on both the evenness and the roughness.

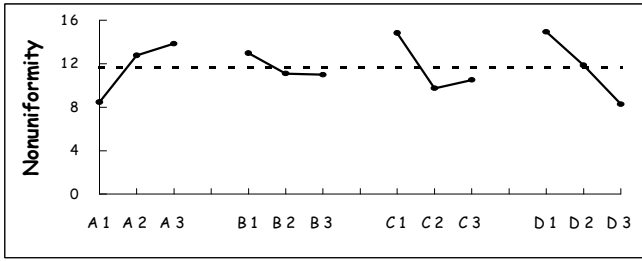

(a) Effect plot based on NU_1

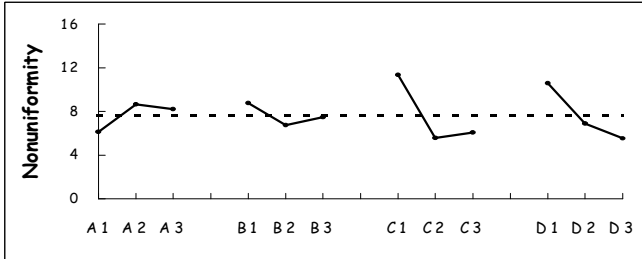

(b) Effect plot based on NU_2

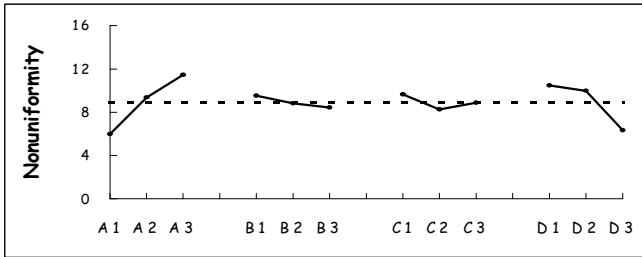

(c) Effect plot based on NU_3

Figure 4: Effect plots for the L_9 experiment

Factor	Degrees of freedom	Sum of Squares	Mean Square	F
A. Time	2	48.50	24.25	6.56
B. Temperature	2	7.40	3.70	
C. Pressure	2	45.08	22.54	6.09
D. Flow rate	2	66.73	33.36	9.02
Error	0	0.00		
Total	8	167.71		
(Error)	2	7.40	3.70	

Table 3: ANOVA table for NU_1

Factor	Degrees of freedom	Sum of Squares	Mean Square	F
A. Time	2	10.82	5.41	
B. Temperature	2	6.25	3.12	
C. Pressure	2	61.37	30.69	7.19
D. Flow Rate	2	40.82	20.41	4.78
Error	0	0.00		
Total	8	119.26		
(Error)	4	17.06	4.27	

Table 4: ANOVA table for NU_2

Factor	Degrees of freedom	Sum of Squares	Mean Square	F
A. Time	2	45.45	22.73	19.04
B. Temperature	2	1.88	0.94	
C. Pressure	2	2.89	1.45	
D. Flow rate	2	30.69	15.35	12.86
Error	0	0.00		
Total	8	80.92		
(Error)	4	4.77	1.19	

Table 5: ANOVA table for NU_3

CONCLUSIONS

In conclusion, rational subgrouping will allow us to understand the wafer-level nonuniformity with two distinct features. One is the surface roughness and the other is the surface unevenness. Very different actions may be needed to improve the two different features. We also find in our study that it is dangerous to use the usual nonuniformity metric alone. Nonuniformity metrics with rational data subgrouping will be needed to provide a more complete picture on the wafer-level nonuniformity and better strategies to optimize the process.

REFERENCES

- [1] M. Phadke, *Quality Engineering Using Robust Design*, Prentice-Hall, 1989.
- [2] R. Guo and E. Sachs, "Modeling, Optimizaion and Control of Spatial Uniformity in Manufacturing Processes," IEEE Transactions on Semiconductor Manufacturing, vol.6, no.1, 1993.
- [3] T. Smith, B. Goodlin, and D. Boning, "Bias and Variance in Single and Multiple Response Surface Modeling," 3rd International Workshop on Statistical Metrology, Hawaii, 1996.